


## 1. 企業概要

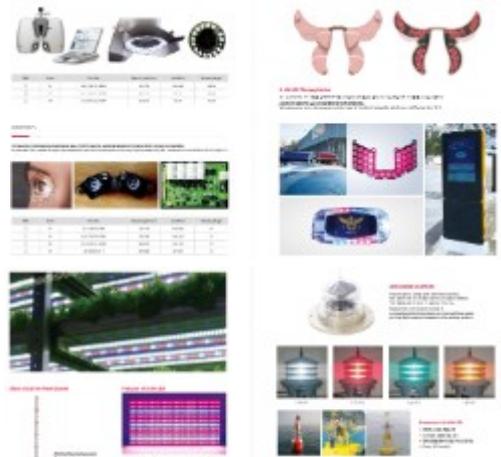
企業名 (設立日)	(株)ユージン LED (1976.07)	代表者名	ユ・ウオンジョン
住所	48-40, Gamnae-gil, Ilsandong-gu, Goyang-si, Gyeonggi-do, Korea		
URL	http://www.ujin-led.co.kr/		
事業内容	LED (Light Emitting Diode) & LED モジュール		

## 2. 製品名 : LED (Light Emitting Diode) & LED モジュール

## 3. 製品概要(適用分野)

LPR/ITS・交通信号・ナンバープレート認識・植物栽培・サインボード・  
水槽・マリンランタン・CCTV・医療用 LED ライト等

 <p><b>LED</b></p> <p><b>Features</b></p> <ul style="list-style-type: none"> <li>High efficiency</li> <li>Absolute color coherence</li> <li>Stability of color rendering</li> <li>Substrate for "Low thermal" type design</li> <li>New design plan, handling of various technology for custom assembly, improved performance and cost</li> </ul> <p><b>Application</b></p> <ul style="list-style-type: none"> <li>Street lighting</li> <li>Automotive lighting</li> <li>Architectural lighting</li> <li>Signage lighting</li> <li>Decorative lights</li> <li>Street lights</li> </ul> <p><b>Features</b></p> <ul style="list-style-type: none"> <li>Wide voltage FLIC LED package</li> <li>High power LED lighting application</li> <li>Small size package</li> <li>Wide viewing angle (20°) for better visibility</li> </ul> <p><b>Application</b></p> <ul style="list-style-type: none"> <li>Industrial illumination for cameras</li> <li>Automotive (DRL, Start, View Guard)</li> <li>Surveillance systems</li> <li>Machine vision systems</li> </ul>	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <p><b>74037A-45 (396-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (130x130x15mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>73036A-30 (216-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (130x130x15mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>SW7405PE &amp; CONTROLLER Mini-C-F (12-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (72x60x70mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>SW7405PE &amp; CONTROLLER Mini-F (20-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (77x57x90mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>SW7405PE CIRCLE &amp; CONTROLLER CIRCLE (20-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (105x105x50mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>SW7405PE (21-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (150x140x15mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>SW7405PE(15M-SIMPLE)-F (15-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (77x63x40mm)</li> </ul> </div> <div style="width: 50%;"> <p><b>C98 SW7405PE &amp; CONTROLLER Mini-C (12-7)</b></p>  <ul style="list-style-type: none"> <li>Parking Management System</li> <li>Distance: 3-7M (88x110x15mm)</li> </ul> </div> </div>
<p>&lt;LED Lamp&amp;Power LED &gt;</p>	<p>&lt;License Plate 認識&gt;</p>

	
<p>＜交通信号 LED＞</p>	<p>＜植物栽培/マリンランタン/ バイオメトリックス/セラピー＞</p>

#### 4. 製品の特徴及び仕様

- 1 高効率、さまざまなビームに対応、全内部反射技術搭載、「ランバート型」設計に適した構造
- 2 CCTV セットでは、コントローラーが CCD および CMOS タイプのカメラに最適化されており、IR モジュールとカメラを同期させることで、より鮮明で明るい画像を撮影することが可能
- 3 医療用 LED の場合、アンチエイジング、スキンケア、皮膚トラブルなど、医療ニーズに合わせて、特定の波長を放射

#### 5. 当社技術の強み

- 1 既存の電光掲示板のみならず、植物栽培や医療分野など、様々な分野で活用できる LED を開発

#### 6. 海外売上げ実績

日本、スイス、タイ、香港、カナダ